




# Centrecon Series

## MBR Pole with MAS Top Mount

Medium Base Plate Round Pole with Aluminum Side Mount Fixture(s)



**BULLHORN STYLE**  
USE "B" SUFFIX

### BULLHORN STYLE

Luminaire Orientation	Arm Code
1 @ 0	MASB1
2 @ 180	MASB2
2 @ 90	MASB29
3 @ 90	MASB39
4 @ 90	MASB49

### SPECIFICATIONS


Use Centrecon Specifications.

### COLORS & FINISHES


See Color Selection Guide.

### ANTI-GRAFFITI & SEALER

Optional Coatings available for added protection.

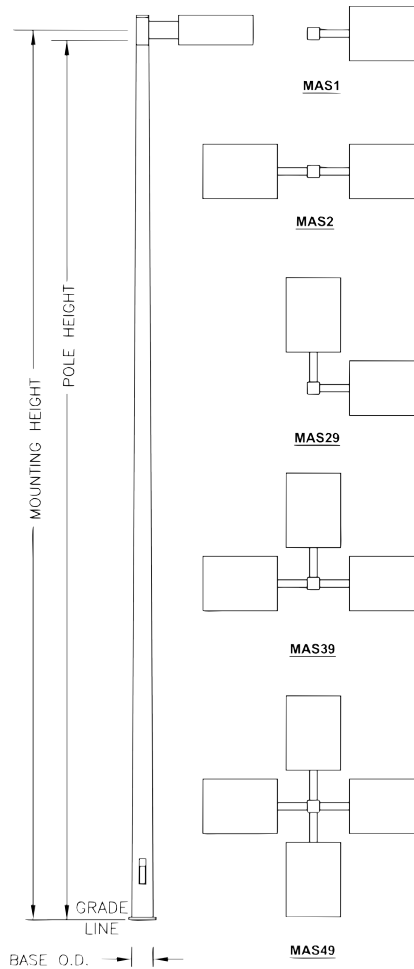

Pole & Arm Configuration Includes Finish Code	Mounting Height	Pole Height	Base OD	Bolt Circle	Base Plate (SQ.)	Luminaire Orientation	Max. 50 lb. Luminaire EPA at 90 mph.	Pole Weight
MBR06*113A-MAS1UN	20'-2"	19'-8"	8-1/4"	11-1/2"	11"	1 @ 0	9.0 sq. ft.	600 lbs.
MBR06*113A-MAS2UN	20'-2"	19'-8"	8-1/4"	11-1/2"	11"	2 @ 180	6.0 sq. ft.	600 lbs.
MBR06*113A-MAS29UN	20'-2"	19'-8"	8-1/4"	11-1/2"	11"	2 @ 90	6.0 sq. ft.	600 lbs.
MBR06*113A-MAS39UN	20'-2"	19'-8"	8-1/4"	11-1/2"	11"	3 @ 90	4.0 sq. ft.	600 lbs.
MBR06*113A-MAS49UN	20'-2"	19'-8"	8-1/4"	11-1/2"	11"	4 @ 90	4.0 sq. ft.	600 lbs.
MBR07*113A-MAS1UN	23'-6"	23'-0"	7-7/8"	11-1/2"	11"	1 @ 0	9.0 sq. ft.	680 lbs.
MBR07*113A-MAS2UN	23'-6"	23'-0"	7-7/8"	11-1/2"	11"	2 @ 180	6.0 sq. ft.	680 lbs.
MBR07*113A-MAS29UN	23'-6"	23'-0"	7-7/8"	11-1/2"	11"	2 @ 90	6.0 sq. ft.	680 lbs.
MBR07*113A-MAS39UN	23'-6"	23'-0"	7-7/8"	11-1/2"	11"	3 @ 90	4.0 sq. ft.	680 lbs.
MBR07*113A-MAS49UN	23'-6"	23'-0"	7-7/8"	11-1/2"	11"	4 @ 90	4.0 sq. ft.	680 lbs.
MBR07.5*113A-MAS1UN	25'-1"	24'-7"	8-1/16"	11-1/2"	11"	1 @ 0	9.0 sq. ft.	750 lbs.
MBR07.5*113A-MAS2UN	25'-1"	24'-7"	8-1/16"	11-1/2"	11"	2 @ 180	6.0 sq. ft.	750 lbs.
MBR07.5*113A-MAS29UN	25'-1"	24'-7"	8-1/16"	11-1/2"	11"	2 @ 90	6.0 sq. ft.	750 lbs.
MBR07.5*113A-MAS39UN	25'-1"	24'-7"	8-1/16"	11-1/2"	11"	3 @ 90	4.0 sq. ft.	750 lbs.
MBR07.5*113A-MAS49UN	25'-1"	24'-7"	8-1/16"	11-1/2"	11"	4 @ 90	4.0 sq. ft.	750 lbs.
MBR08*113A-MAS1UN	26'-9"	26'-3"	8-1/4"	11-1/2"	11"	1 @ 0	9.0 sq. ft.	825 lbs.
MBR08*113A-MAS2UN	26'-9"	26'-3"	8-1/4"	11-1/2"	11"	2 @ 180	6.0 sq. ft.	825 lbs.
MBR08*113A-MAS29UN	26'-9"	26'-3"	8-1/4"	11-1/2"	11"	2 @ 90	6.0 sq. ft.	825 lbs.
MBR08*113A-MAS39UN	26'-9"	26'-3"	8-1/4"	11-1/2"	11"	3 @ 90	4.0 sq. ft.	825 lbs.



# MBR Pole with MAS Top Mount Combinations

Pole & Arm Configuration Includes Finish Code	Mounting Height	Pole Height	Base OD	Bolt Circle	Base Plate (SQ.)	Luminaire Orientation	Max. 50 lb. Luminaire EPA at 90 mph.	Pole Weight
MBR08*113A-MAS49UN	26'-9"	26'-3"	8-1/4"	11-1/2"	11"	4 @ 90	4.0 sq. ft.	825 lbs.
MBR08.5*113A-MAS1UN	28'-5"	27'-11"	8-7/16"	11-1/2"	11"	1 @ 0	9.0 sq. ft.	875 lbs.
MBR08.5*113A-MAS2UN	28'-5"	27'-11"	8-7/16"	11-1/2"	11"	2 @ 180	6.0 sq. ft.	875 lbs.
MBR08.5*113A-MAS29UN	28'-5"	27'-11"	8-7/16"	11-1/2"	11"	2 @ 90	6.0 sq. ft.	875 lbs.
MBR08.5*113A-MAS39UN	28'-5"	27'-11"	8-7/16"	11-1/2"	11"	3 @ 90	4.0 sq. ft.	875 lbs.
MBR08.5*113A-MAS49UN	28'-5"	27'-11"	8-7/16"	11-1/2"	11"	4 @ 90	4.0 sq. ft.	875 lbs.
MBR09*113A-MAS1UN	30'-0"	29'-6"	8-5/8"	11-1/2"	11"	1 @ 0	9.0 sq. ft.	920 lbs.
MBR09*113A-MAS2UN	30'-0"	29'-6"	8-5/8"	11-1/2"	11"	2 @ 180	6.0 sq. ft.	920 lbs.
MBR09*113A-MAS29UN	30'-0"	29'-6"	8-5/8"	11-1/2"	11"	2 @ 90	6.0 sq. ft.	920 lbs.
MBR09*113A-MAS39UN	30'-0"	29'-6"	8-5/8"	11-1/2"	11"	3 @ 90	4.0 sq. ft.	920 lbs.
MBR09*113A-MAS49UN	30'-0"	29'-6"	8-5/8"	11-1/2"	11"	4 @ 90	4.0 sq. ft.	920 lbs.
MBRX09.5*113A-MAS1UN	31'-8"	31'-2"	8-7/8"	11-1/2"	11"	1 @ 0	9.0 sq. ft.	1,050 lbs.
MBRX09.5*113A-MAS2UN	31'-8"	31'-2"	8-7/8"	11-1/2"	11"	2 @ 180	6.0 sq. ft.	1,050 lbs.
MBRX09.5*113A-MAS29UN	31'-8"	31'-2"	8-7/8"	11-1/2"	11"	2 @ 90	6.0 sq. ft.	1,050 lbs.
MBRX09.5*113A-MAS39UN	31'-8"	31'-2"	8-7/8"	11-1/2"	11"	3 @ 90	4.0 sq. ft.	1,050 lbs.
MBRX09.5*113A-MAS49UN	31'-8"	31'-2"	8-7/8"	11-1/2"	11"	4 @ 90	4.0 sq. ft.	1,050 lbs.
MBRX10*113A-MAS1UN	33'-4"	32'-10"	9-1/16"	11-1/2"	11"	1 @ 0	9.0 sq. ft.	1,150 lbs.
MBRX10*113A-MAS2UN	33'-4"	32'-10"	9-1/16"	11-1/2"	11"	2 @ 180	6.0 sq. ft.	1,150 lbs.
MBRX10*113A-MAS29UN	33'-4"	32'-10"	9-1/16"	11-1/2"	11"	2 @ 90	6.0 sq. ft.	1,150 lbs.
MBRX10*113A-MAS39UN	33'-4"	32'-10"	9-1/16"	11-1/2"	11"	3 @ 90	4.0 sq. ft.	1,150 lbs.
MBRX10*113A-MAS49UN	33'-4"	32'-10"	9-1/16"	11-1/2"	11"	4 @ 90	4.0 sq. ft.	1,150 lbs.
MBRX10.6*113A-MAS1UN	35'-3"	34'-9"	9-5/16"	14"	13"	1 @ 0	9.0 sq. ft.	1,200 lbs.
MBRX10.6*113A-MAS2UN	35'-3"	34'-9"	9-5/16"	14"	13"	2 @ 180	6.0 sq. ft.	1,200 lbs.
MBRX10.6*113A-MAS29UN	35'-3"	34'-9"	9-5/16"	14"	13"	2 @ 90	6.0 sq. ft.	1,200 lbs.
MBRX10.6*113A-MAS39UN	35'-3"	34'-9"	9-5/16"	14"	13"	3 @ 90	4.0 sq. ft.	1,200 lbs.
MBRX10.6*113A-MAS49UN	35'-3"	34'-9"	9-5/16"	14"	13"	4 @ 90	4.0 sq. ft.	1,200 lbs.
MBRX11.7*113A-MAS1UN	38'-11"	38'-5"	9-3/4"	14"	13"	1 @ 0	9.0 sq. ft.	1,700 lbs.
MBRX11.7*113A-MAS2UN	38'-11"	38'-5"	9-3/4"	14"	13"	2 @ 180	6.0 sq. ft.	1,700 lbs.
MBRX11.7*113A-MAS29UN	38'-11"	38'-5"	9-3/4"	14"	13"	2 @ 90	6.0 sq. ft.	1,700 lbs.
MBRX11.7*113A-MAS39UN	38'-11"	38'-5"	9-3/4"	14"	13"	3 @ 90	4.0 sq. ft.	1,700 lbs.
MBRX11.7*113A-MAS49UN	38'-11"	38'-5"	9-3/4"	14"	13"	4 @ 90	4.0 sq. ft.	1,700 lbs.
MBRX12*113A-MAS1UN	39'-10"	39'-4"	11-3/8"	15"	14"	1 @ 0	9.0 sq. ft.	1,800 lbs.
MBRX12*113A-MAS2UN	39'-10"	39'-4"	11-3/8"	15"	14"	2 @ 180	6.0 sq. ft.	1,800 lbs.
MBRX12*113A-MAS29UN	39'-10"	39'-4"	11-3/8"	15"	14"	2 @ 90	6.0 sq. ft.	1,800 lbs.
MBRX12*113A-MAS39UN	39'-10"	39'-4"	11-3/8"	15"	14"	3 @ 90	4.0 sq. ft.	1,800 lbs.
MBRX12*113A-MAS49UN	39'-10"	39'-4"	11-3/8"	15"	14"	4 @ 90	4.0 sq. ft.	1,800 lbs.
MBRX13*113A-MAS1UN	43'-2"	42'-8"	11-15/16"	16-1/2"	16"	1 @ 0	9.0 sq. ft.	2,100 lbs.
MBRX13*113A-MAS2UN	43'-2"	42'-8"	11-15/16"	16-1/2"	16"	2 @ 180	6.0 sq. ft.	2,100 lbs.
MBRX13*113A-MAS29UN	43'-2"	42'-8"	11-15/16"	16-1/2"	16"	2 @ 90	6.0 sq. ft.	2,100 lbs.
MBRX13*113A-MAS39UN	43'-2"	42'-8"	11-15/16"	16-1/2"	16"	3 @ 90	4.0 sq. ft.	2,100 lbs.
MBRX13*113A-MAS49UN	43'-2"	42'-8"	11-15/16"	16-1/2"	16"	4 @ 90	4.0 sq. ft.	2,100 lbs.
MBRX14*113A-MAS1UN	46'-5"	45'-11"	12-7/16"	16-1/2"	16"	1 @ 0	9.0 sq. ft.	2,350 lbs.
MBRX14*113A-MAS2UN	46'-5"	45'-11"	12-7/16"	16-1/2"	16"	2 @ 180	6.0 sq. ft.	2,350 lbs.
MBRX14*113A-MAS29UN	46'-5"	45'-11"	12-7/16"	16-1/2"	16"	2 @ 90	6.0 sq. ft.	2,350 lbs.
MBRX14*113A-MAS39UN	46'-5"	45'-11"	12-7/16"	16-1/2"	16"	3 @ 90	4.0 sq. ft.	2,350 lbs.
MBRX14*113A-MAS49UN	46'-5"	45'-11"	12-7/16"	16-1/2"	16"	4 @ 90	4.0 sq. ft.	2,350 lbs.
<i>MBRX15*113A-MAS1UN</i>	<i>49'-8"</i>	<i>49'-2"</i>	<i>13"</i>	<i>17-1/2"</i>	<i>17"</i>	<i>1 @ 0</i>	<i>9.0 sq. ft.</i>	<i>2,700 lbs.</i>
<i>MBRX15*113A-MAS2UN</i>	<i>49'-8"</i>	<i>49'-2"</i>	<i>13"</i>	<i>17-1/2"</i>	<i>17"</i>	<i>2 @ 180</i>	<i>5.5 sq. ft.</i>	<i>2,700 lbs.</i>
<i>MBRX15*113A-MAS29UN</i>	<i>49'-8"</i>	<i>49'-2"</i>	<i>13"</i>	<i>17-1/2"</i>	<i>17"</i>	<i>2 @ 90</i>	<i>5.5 sq. ft.</i>	<i>2,700 lbs.</i>
<i>MBRX15*113A-MAS39UN</i>	<i>49'-8"</i>	<i>49'-2"</i>	<i>13"</i>	<i>17-1/2"</i>	<i>17"</i>	<i>3 @ 90</i>	<i>4.0 sq. ft.</i>	<i>2,700 lbs.</i>
<i>MBRX15*113A-MAS49UN</i>	<i>49'-8"</i>	<i>49'-2"</i>	<i>13"</i>	<i>17-1/2"</i>	<i>17"</i>	<i>4 @ 90</i>	<i>4.0 sq. ft.</i>	<i>2,700 lbs.</i>

*Italics indicate pole availability at Everett Plant only.*

**Standard Anchor Bolts: 1" x 36" x 4" (Purchase Separately)**

## Pole & Arm Designator Layout

