

Ameron™

Centrecon L-Series Round Pole

Available in base plate and embedded styles.

Our Centrecon LBR and LER tapered lighting poles provide the durable strength required for roadway lighting, parking lots, stadiums and area security. Application can be post top, mast arm or side mounted.

Features and Benefits

- High tensile steel cables, a welded wire cage and high strength centrifugally cast concrete provide optimum strength and torsional reinforcement
- Prestressed spun-cast concrete provides long-term durability and vibration resistance
- Natural stone and terrazzo aggregates maintain a like new appearance with virtually no maintenance
- Conforms to applicable sections of ACI, AASHTO, ASTM, and IBC standards
- Exclusive 10-year warranty

Colors and Finishes

A wide range of standard, pre-formulated and custom colors are available. The concrete shafts are blasted to expose the texture and color of the natural stone. See separate Aggregates and Finishes sheet for details. We offer Amershield™, a premium graffiti-resistant coating, as well as other durable sealers and protectants that further enhance colors, protect the concrete surface and aid in the removal of graffiti.

Durability with a classic touch.



For further information contact us at: 1.800.552.6376



nov.com/poleproducts

Ameron™ Centrecon L-Series Round Pole

6-11/16" TOP O.D.

Base plate style - information

Catalog Number	Pole Height "A"	Bottom Dia.	Anchor Bolt	Bolt Circle	Base Plate (SQ)	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
LBR09	29'-6"	11-3/8"	1" x 36"x 4"	16-1/2"	16"	48,300	1,550
LBRX10	32'-10"	11-15/16"	1" x 36"x 4"	16-1/2"	16"	51,000	1,850
LBRX11	36'-1"	12-7/16"	1" x 36"x 4"	16-1/2"	16"	54,700	2,150
LBRX12	39'-4"	13"	1-1/4" x 48" x 6"	17-1/2"	17"	58,300	2,500
LBRX13	42'-8"	13-1/2"	1-1/4" x 48" x 6"	17-1/2"	17"	62,000	2,850
LBRX14	45'-11"	14"	1-1/4" x 48" x 6"	18-1/2"	18"	65,200	3,100
LBRX15*	49'-2"	14-9/16"	1-1/4" x 48" x 6"	18-1/2"	18"	69,400	3,500

Embedded style - information

Catalog Number	Pole Height "A"	Bottom Dia.	Embedded Depth "B"	Overall Length "OL"	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
LER07.5	24'-7"	11-3/8"	4'-11"	29'-6"	31,700	1,500
LER08.4	27'-7"	11-15/16"	5'-3"	32'-10"	36,000	2,000
LERX09.3	30'-6"	12-7/16"	5'-7"	36'-1"	38,600	2,400
LERX10.2	33'-5"	13"	5'-11"	39'-4"	51,800	2,800
LERX11.1*	36'-5"	13-1/2"	6'-3"	42'-8"	55,000	3,000
LERX12*	39'-4"	14"	6'-7"	45'-11"	58,300	3,200
LERX12.9*	42'-3"	14-9/16"	6'-11"	49'-2"	61,600	3,500



*LBRX15, LERX11.1, LERX12 and LERX12.9 are only available from Everett, WA.

Specifications: Use Centrecon Specifications


Colors and finishes: See Centrecon color selection guide

Luminaire mounting: See Mounting Options section for more information


Anti-graffiti and sealer: Optional coatings available for added protection

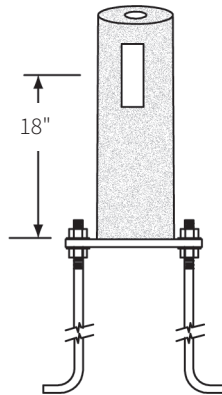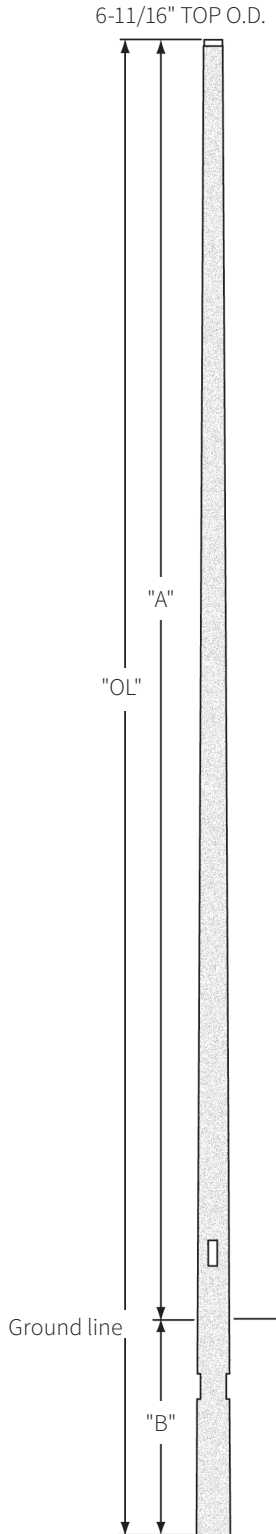

Elevation
See recommended "capping detail"



Shaft cross section detail

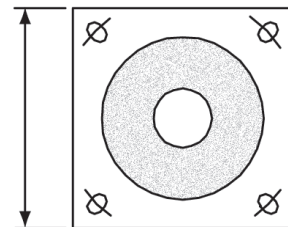

Std base plate
prestressed to pole

For further information contact us at: 1.800.552.6376



nov.com/poleproducts

© 2017 National Oilwell Varco - All rights reserved - 11536_ENG_v01