

Ameron™

Victorian X Pole

Available in base plate and embedded styles.

Eight crisp lines ascend and outline our classic Victorian X pole. The stately triple step base dramatically contours to an elegantly tapered octagonal shaft.


The Victorian X is available in a range of sizes from 17-foot to nearly 30-foot above grade. The Victorian X is well suited for bustling streetscapes, narrow walkways and everything in between. Our Victorian Style prestressed, spun-cast concrete lighting poles combine the charm of yesterday with today's technology.

Features and Benefits

- Constructed with highest quality prestressed concrete, these centrifugally cast, poles are strong, vibration resistant and maintain a like new appearance with virtually no maintenance
- Ameron poles conform to applicable sections of ACI, AASHTO, ASTM and PCI standards
- All Ameron spun-cast concrete poles have our exclusive ten-year warranty

Colors and Finishes

A wide range of standard, pre-formulated and custom aggregate colors provide architects and designers with many creative options. The concrete shafts are lightly blasted to expose the texture and beauty of the natural stone. See separate aggregate sheet for details. We offer Amershield™, a premium graffiti-resistant coating, as well as other durable sealers and protectants that further enhance colors, protect the concrete surface and aid in the removal of graffiti.

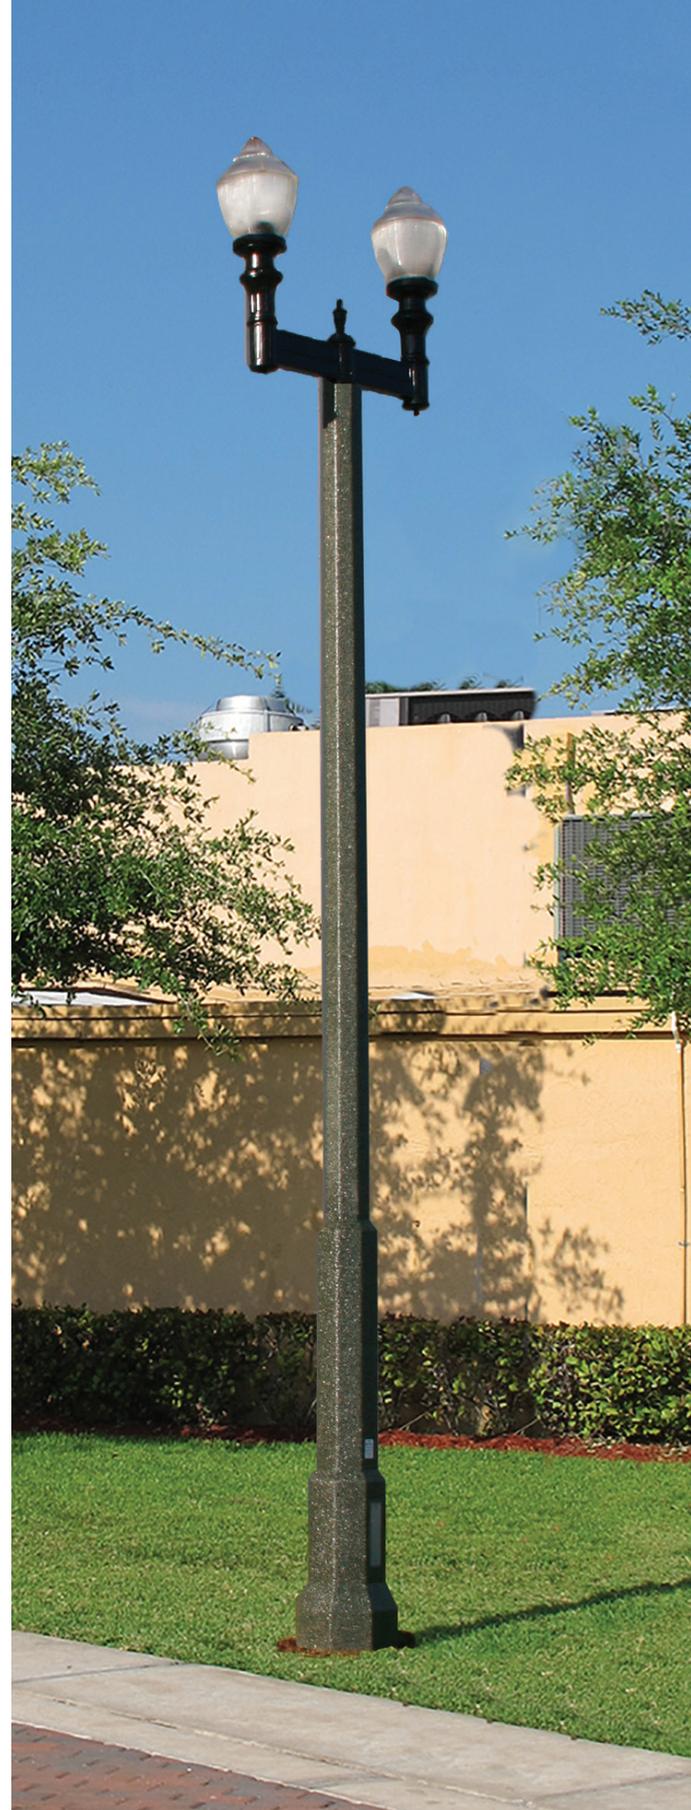


For further information contact us at: 1.800.552.6376



poleproducts@nov.com

nov.com/poleproducts

Ameron™ Victorian X Pole

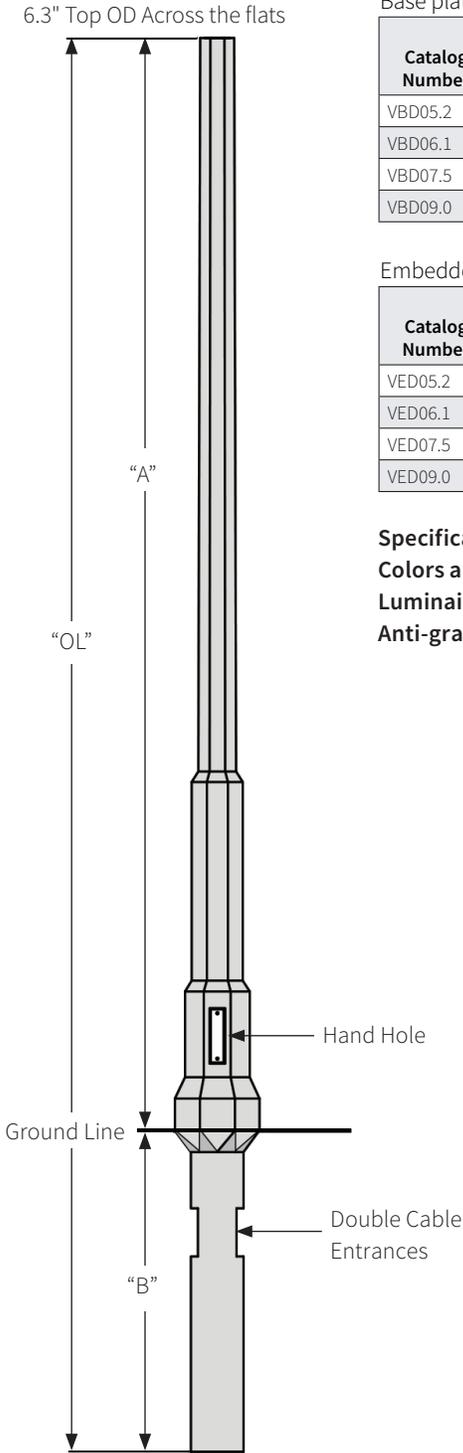

Base plate style - information

Catalog Number	Pole Height "A"	Base OD	Anchor Bolt	Bolt Circle (in.)	Base Plate (Sq)	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
VBD05.2	17'-0"	15-3/4"	3/4" x 24" x 4"	19"	17"	26,700	980
VBD06.1	20'-0"	15-3/4"	3/4" x 24" x 4"	19"	17"	26,700	1050
VBD07.5	24'-7"	15-3/4"	1" X 36" X 4"	19"	17"	30,900	1200
VBD09.0	29'-6"	15-3/4"	1" X 36" X 4"	19"	17"	30,900	1470

Embedded style - information



Catalog Number	Pole Height "A"	Base OD	Embedded Depth "B"	Overall Length "OL"	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
VED05.2	17'-0"	15-3/4"	5'-0"	22'-0"	26,700	1170
VED06.1	20'-0"	15-3/4"	5'-0"	25'-0"	26,700	1240
VED07.5	24'-7"	15-3/4"	5'-0"	29'-7"	30,900	1390
VED09.0	29'-6"	15-3/4"	5'-0"	34'-6"	30,900	1660

Specifications: Use Centrecon Specifications


Colors and finishes: See Centrecon Series Color Selection guide

Luminaire mounting: See technical-mounting options section for more information.

Anti-graffiti and sealer: Optional coatings available for added protection

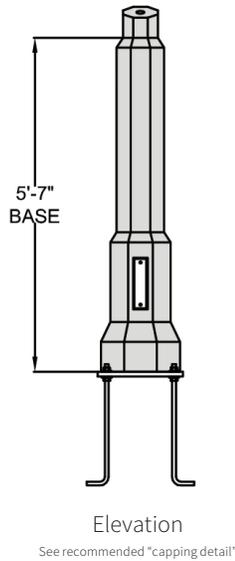

Base plate prestressed to pole



Shaft cross section detail

For further information contact us at: 1.800.552.6376



poleproducts@nov.com

nov.com/poleproducts

© 2017 National Oilwell Varco - All rights reserved - CMKT-1629_ENG_v01