




Centrecon Series

MBR Pole with MRAP Single Arm

Medium Base Plate Round Pole with Aluminum Pipe Arm

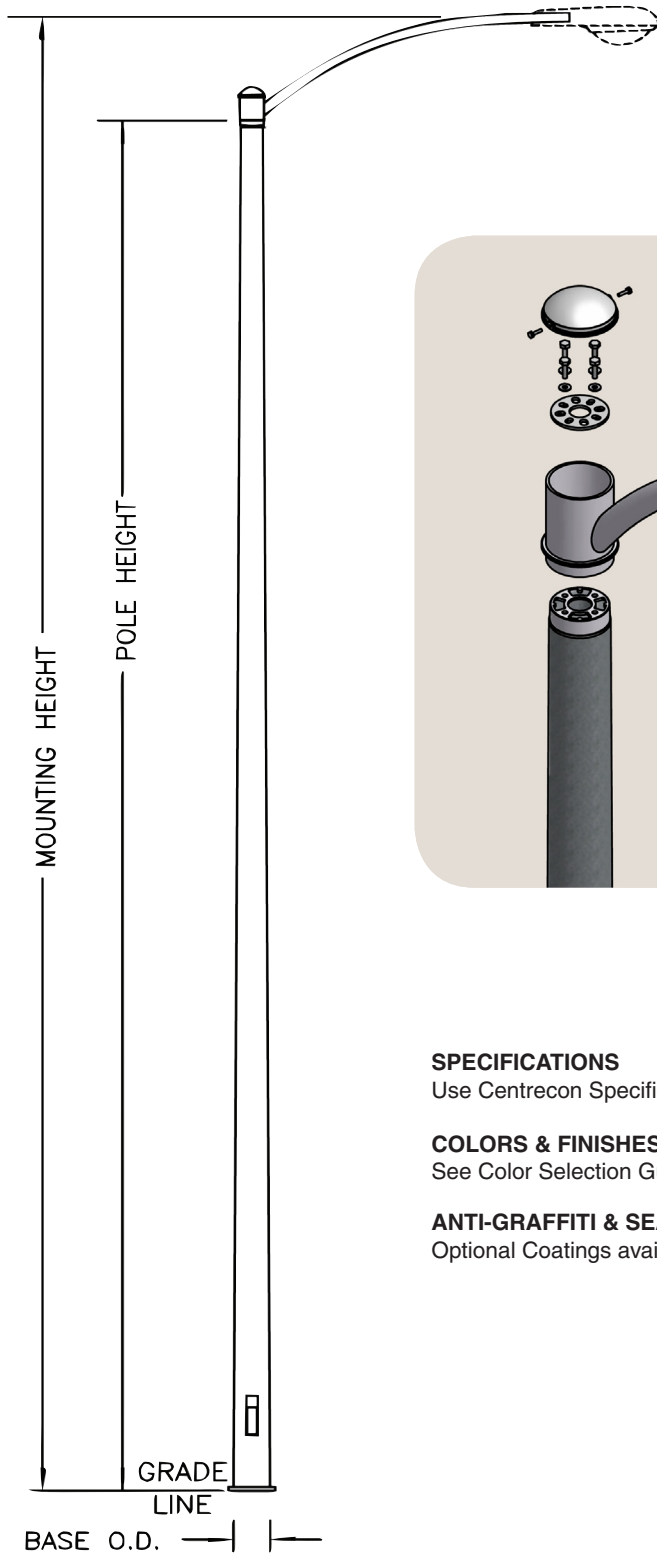

SPECIFICATIONS

Use Centrecon Specifications.

COLORS & FINISHES

See Color Selection Guide.

ANTI-GRAFFITI & SEALER

Optional Coatings available for added protection.



MBR Pole with MRAP Single Arm Combinations

Pole & Arm Configuration Includes Finish Code	Mounting Height	Pole Height	Base OD	Bolt Circle	Base Plate (SQ.)	Arm Length	Max. 50 lb. Luminaire EPA at 90 mph.	Pole Weight
MBR06*113A-MRAP4UN	21'-5"	19'-8"	8-1/4"	11-1/2"	11"	4'	5.4 sq. ft.	600 lbs.
MBR06*113A-MRAP6UN	21'-11"	19'-8"	8-1/4"	11-1/2"	11"	6'	3.3 sq. ft.	600 lbs.
MBR06*113A-MRAP8UN	22'-5"	19'-8"	8-1/4"	11-1/2"	11"	8'	2.2 sq. ft.	600 lbs.
MBR07*113A-MRAP4UN	24'-9"	23'-0"	7-7/8"	11-1/2"	11"	4'	5.4 sq. ft.	680 lbs.
MBR07*113A-MRAP6UN	25'-3"	23'-0"	7-7/8"	11-1/2"	11"	6'	3.3 sq. ft.	680 lbs.
MBR07*113A-MRAP8UN	25'-9"	23'-0"	7-7/8"	11-1/2"	11"	8'	2.2 sq. ft.	680 lbs.
MBR07.5*113A-MRAP4UN	26'-4"	24'-7"	8-1/16"	11-1/2"	11"	4'	5.4 sq. ft.	750 lbs.
MBR07.5*113A-MRAP6UN	26'-10"	24'-7"	8-1/16"	11-1/2"	11"	6'	3.3 sq. ft.	750 lbs.
MBR07.5*113A-MRAP8UN	27'-4"	24'-7"	8-1/16"	11-1/2"	11"	8'	2.2 sq. ft.	750 lbs.
MBR08*113A-MRAP4UN	28'-0"	26'-3"	8-1/4"	11-1/2"	11"	4'	5.4 sq. ft.	825 lbs.
MBR08*113A-MRAP6UN	28'-6"	26'-3"	8-1/4"	11-1/2"	11"	6'	3.3 sq. ft.	825 lbs.
MBR08*113A-MRAP8UN	29'-0"	26'-3"	8-1/4"	11-1/2"	11"	8'	2.2 sq. ft.	825 lbs.
MBR08.5*113A-MRAP4UN	29'-8"	27'-11"	8-7/16"	11-1/2"	11"	4'	5.4 sq. ft.	875 lbs.
MBR08.5*113A-MRAP6UN	30'-2"	27'-11"	8-7/16"	11-1/2"	11"	6'	3.3 sq. ft.	875 lbs.
MBR08.5*113A-MRAP8UN	30'-8"	27'-11"	8-7/16"	11-1/2"	11"	8'	2.2 sq. ft.	875 lbs.
MBR09*113A-MRAP4UN	31'-3"	29'-6"	8-5/8"	11-1/2"	11"	4'	5.4 sq. ft.	920 lbs.
MBR09*113A-MRAP6UN	31'-9"	29'-6"	8-5/8"	11-1/2"	11"	6'	3.3 sq. ft.	920 lbs.
MBR09*113A-MRAP8UN	32'-3"	29'-6"	8-5/8"	11-1/2"	11"	8'	2.2 sq. ft.	920 lbs.
MBRX09.5*113A-MRAP4UN	32'-11"	31'-2"	8-7/8"	11-1/2"	11"	4'	5.2 sq. ft.	1,050 lbs.
MBRX09.5*113A-MRAP6UN	33'-5"	31'-2"	8-7/8"	11-1/2"	11"	6'	3.1 sq. ft.	1,050 lbs.
MBRX09.5*113A-MRAP8UN	33'-11"	31'-2"	8-7/8"	11-1/2"	11"	8'	2.1 sq. ft.	1,050 lbs.
MBRX10*113A-MRAP4UN	34'-7"	32'-10"	9-1/16"	11-1/2"	11"	4'	5.2 sq. ft.	1,150 lbs.
MBRX10*113A-MRAP6UN	35'-1"	32'-10"	9-1/16"	11-1/2"	11"	6'	3.1 sq. ft.	1,150 lbs.
MBRX10*113A-MRAP8UN	35'-7"	32'-10"	9-1/16"	11-1/2"	11"	8'	2.1 sq. ft.	1,150 lbs.
MBRX10.6*113A-MRAP4UN	36'-6"	34'-9"	9-5/16"	14"	13"	4'	5.2 sq. ft.	1,200 lbs.
MBRX10.6*113A-MRAP6UN	37'-0"	34'-9"	9-5/16"	14"	13"	6'	3.1 sq. ft.	1,200 lbs.
MBRX10.6*113A-MRAP8UN	37'-6"	34'-9"	9-5/16"	14"	13"	8'	2.1 sq. ft.	1,200 lbs.
MBRX11.7*113A-MRAP4UN	40'-2"	38'-5"	9-3/4"	14"	13"	4'	5.0 sq. ft.	1,700 lbs.
MBRX11.7*113A-MRAP6UN	40'-8"	38'-5"	9-3/4"	14"	13"	6'	3.0 sq. ft.	1,700 lbs.
MBRX11.7*113A-MRAP8UN	41'-2"	38'-5"	9-3/4"	14"	13"	8'	2.0 sq. ft.	1,700 lbs.
MBRX12*113A-MRAP4UN	41'-1"	39'-4"	11-3/8"	15"	14"	4'	5.0 sq. ft.	1,800 lbs.
MBRX12*113A-MRAP6UN	41'-7"	39'-4"	11-3/8"	15"	14"	6'	3.0 sq. ft.	1,800 lbs.
MBRX12*113A-MRAP8UN	42'-1"	39'-4"	11-3/8"	15"	14"	8'	2.0 sq. ft.	1,800 lbs.
MBRX13*113A-MRAP4UN	44'-5"	42'-8"	11-15/16"	16-1/2"	16"	4'	5.0 sq. ft.	2,100 lbs.
MBRX13*113A-MRAP6UN	44'-11"	42'-8"	11-15/16"	16-1/2"	16"	6'	3.0 sq. ft.	2,100 lbs.
MBRX13*113A-MRAP8UN	45'-5"	42'-8"	11-15/16"	16-1/2"	16"	8'	2.0 sq. ft.	2,100 lbs.
MBRX14*113A-MRAP4UN	47'-8"	45'-11"	12-7/16"	16-1/2"	16"	4'	5.0 sq. ft.	2,350 lbs.
MBRX14*113A-MRAP6UN	48'-2"	45'-11"	12-7/16"	16-1/2"	16"	6'	3.0 sq. ft.	2,350 lbs.
MBRX14*113A-MRAP8UN	48'-8"	45'-11"	12-7/16"	16-1/2"	16"	8'	2.0 sq. ft.	2,350 lbs.
<i>MBRX15*113A-MRAP4UN</i>	<i>50'-11"</i>	<i>49'-2"</i>	<i>13"</i>	<i>17-1/2"</i>	<i>17"</i>	<i>4'</i>	<i>4.8 sq. ft.</i>	<i>2,700 lbs.</i>
<i>MBRX15*113A-MRAP6UN</i>	<i>51'-5"</i>	<i>49'-2"</i>	<i>13"</i>	<i>17-1/2"</i>	<i>17"</i>	<i>6'</i>	<i>2.8 sq. ft.</i>	<i>2,700 lbs.</i>
<i>MBRX15*113A-MRAP8UN</i>	<i>51'-11"</i>	<i>49'-2"</i>	<i>13"</i>	<i>17-1/2"</i>	<i>17"</i>	<i>8'</i>	<i>1.8 sq. ft.</i>	<i>2,700 lbs.</i>

Italics indicate pole availability at Everett Plant only.

Standard Anchor Bolts: 1" x 36" x 4" (Purchase Separately)

Pole & Arm Designator Layout

