

Ameron™

Traditional Series

Kodiak Pole

Available in base plate and embedded styles

The stark simplicity of the Kodiak pole makes it a fitting complement to a wide variety of architectural styles, both traditional and modern. The tapered octagonal shaft is gracefully understated.

Our Traditional Series lighting poles combine the charm of yesterday with the technology of today. Available in a wide variety of styles, colors and finishes, these poles provide architects and designers with many creative options.

Features and Benefits

- Prestressed steel and highest quality concrete are centrifugally cast for ultimate strength and durability.
- Natural stone and terrazzo aggregates maintain a like new appearance with virtually no maintenance.
- Conforms to applicable sections of ACI, AASHTO, ASTM, and IBC standards.
- Exclusive 10-year warranty

Colors and Finishes

A wide range of standard, pre-formulated and custom colors are available. The concrete shafts are lightly blasted to expose the texture and color of the natural stone. See separate Aggregates and Finishes sheet for details. We offer Amershield™, a premium graffiti-resistant coating, as well as other durable sealers and protectants that further enhance colors, protect the concrete surface and aid in the removal of graffiti.

Durability with a classic touch.




For further information contact us at: 1.800.552.6376



poleproducts@nov.com

nov.com/poleproducts

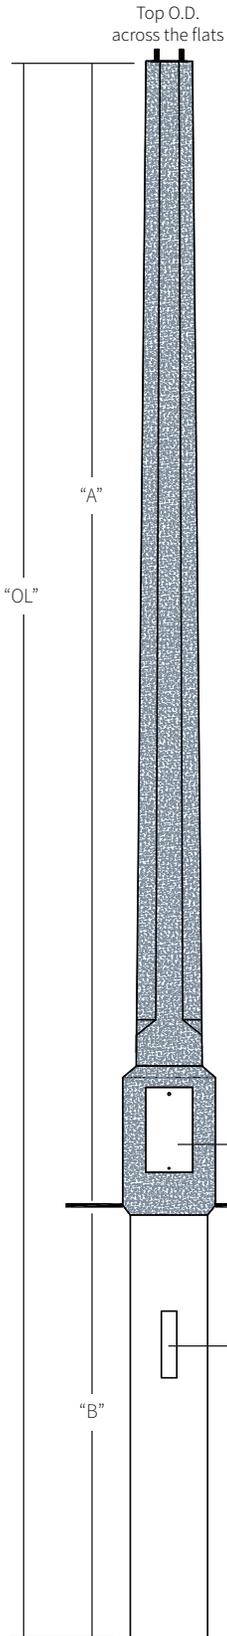

Base Plate Style - Information

Catalog Number	Pole Height "A"	Top O.D.	Base O.D.	Anchor Bolt	Bolt Circle	Base Plate (Rect)	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
10CT12	12'-4"	6"	12-1/2"	3/4" x 18" x 4"	7 1/2" x 15"	13-1/2" x 18"	12,500	600
10CT14	14'-4"	5-1/2"	12-1/2"	3/4" x 18" x 4"	7 1/2" x 15"	13-1/2" x 18"	12,500	800
10CT18	18'-4"	4-1/2"	12-1/2"	3/4" x 18" x 4"	7 1/2" x 15"	13-1/2" x 18"	12,500	1,100

Embedded Style - Information


Catalog Number	Pole Height "A"	Top O.D.	Base O.D.	Embedded Depth "B"	Overall Length "OL"	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
10ET12	12'-4"	6"	12-1/2"	4'-8"	17'-0"	12,500	1,000
10ET14	14'-4"	5-1/2"	12-1/2"	4'-8"	19'-0"	12,500	1,200
10ET18	18'-4"	4-1/2"	12-1/2"	4'-8"	23'-0"	12,500	1,500

Specifications: Use Contemporary Specifications


Colors and finishes: See Contemporary Color Selection guide

Luminaire mounting: See technical-mounting options section for more information

Anti-graffiti and sealer: Optional coatings available for added protection




Shaft Cross Section Detail

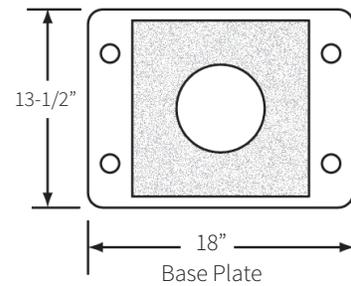

Hand Hole

2 Cable Entrances:
1 @ 0 degrees
1 @ 180 degrees

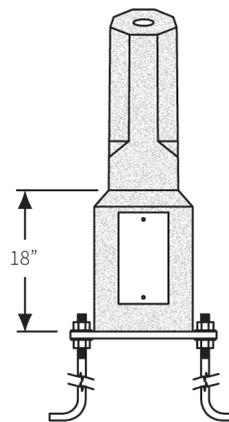

10CT Elevation
See recommended "capping detail"

For further information contact us at: 1.800.552.6376